



"The Princess Is Sleeping" Door Hanger

6" x 10"



©2018 - Carol Swift - All Rights Reserved - JUST LET ME QUILT
Pattern for personal and non-profit use only. Not for sale or distribution.
<http://justletmequilt.com> - sewswift6@gmail.com

Heat n Bond Fleece Fusible High Loft
Therm O Web EZ Print Lite Sheets or Heat n Bond Lite
Therm O Web Fabric Fuse Liquid Adhesive
Aurifil Thread
Oliso Purple Iron
Fabric
String/ribbon
Button
Embroidery thread

Fabric needed:

1 Fat Quarter (hanger base)
Small pieces of fabric (princess, bed, heart)

Cutting instructions:

Cut 2 - fabric, front and back hanger base
Cut 2 - Heat n Bond Fleece Fusible High Loft
Cut 1 - String/Ribbon, 8"

Applique Preparation:

Prepare the princess applique designs following either of the applique instructions below:

a. Applique with printable Heat n Bond EZ Print Lite sheets: Using your inkjet printer, print out applique pattern pieces using Heat n Bond EZ Print Lite sheets. Load one sheet at a time into the paper tray. Sheet should be placed so printing is on the smooth side of the paper. Print quality at the normal setting and for plain paper. Allow 5-10 seconds for ink to dry.



b. Applique with Heat n Bond Lite: Trace applique designs on the smooth side of Heat n Bond Lite.

Step 1: Iron adhesive pieces to wrong sides of fabrics with a medium heat iron, no steam. Press for 2 seconds. Repeat until all surfaces have been bonded to fabric. Let cool. Cut out applique pieces. Peel off paper liner.



Step 2: Place applique shape, adhesive side down, on top of right side of fabric on hanger base front. Press and hold iron for 6 seconds on each section until entire piece is bonded. Let cool.

*Hint: Using a heatproof applique sheet to arrange your designs before ironing them to your fabric helps avoid mistakes. Lightly press each piece in place, let cool, lift and move to your fabric.



Step 3: Iron Heat n Bond Fleece Fusible High Loft to wrong side of fabric on front and back hanger bases following manufacturer's directions.



Step 4: Sew around applique edges using a straight, zig-zag, or blanket stitch. Trace and embroider lettering and eyes.




Step 5: With right sides together, sew around edges of front and back hanger base leaving a 2" opening on side for turning. Turn inside out; hand stitch opening closed. Press

Step 6: Following the applique directions above, make two applique hearts. Matching all edges, press adhesive sides of heart together. Trim if necessary.




Step 7: Attach heart to front of hanger base by sewing a button to the front and back. Using Fabric Fuse Adhesive helps hold the heart and button in place to making sewing easier. Apply Fabric Fuse and allow to dry. Sew buttons to front and back with thread.

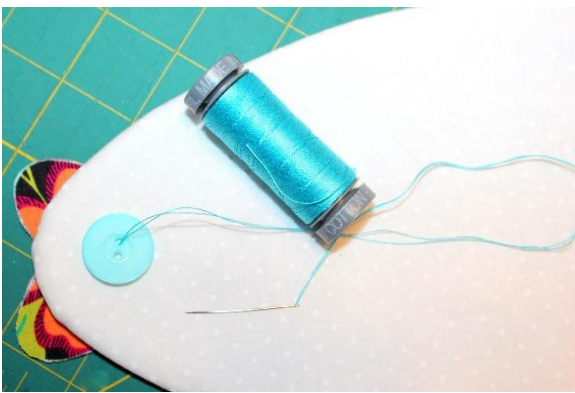



Step 8: Attach looped string/ribbon to back button for hanging on door knob.



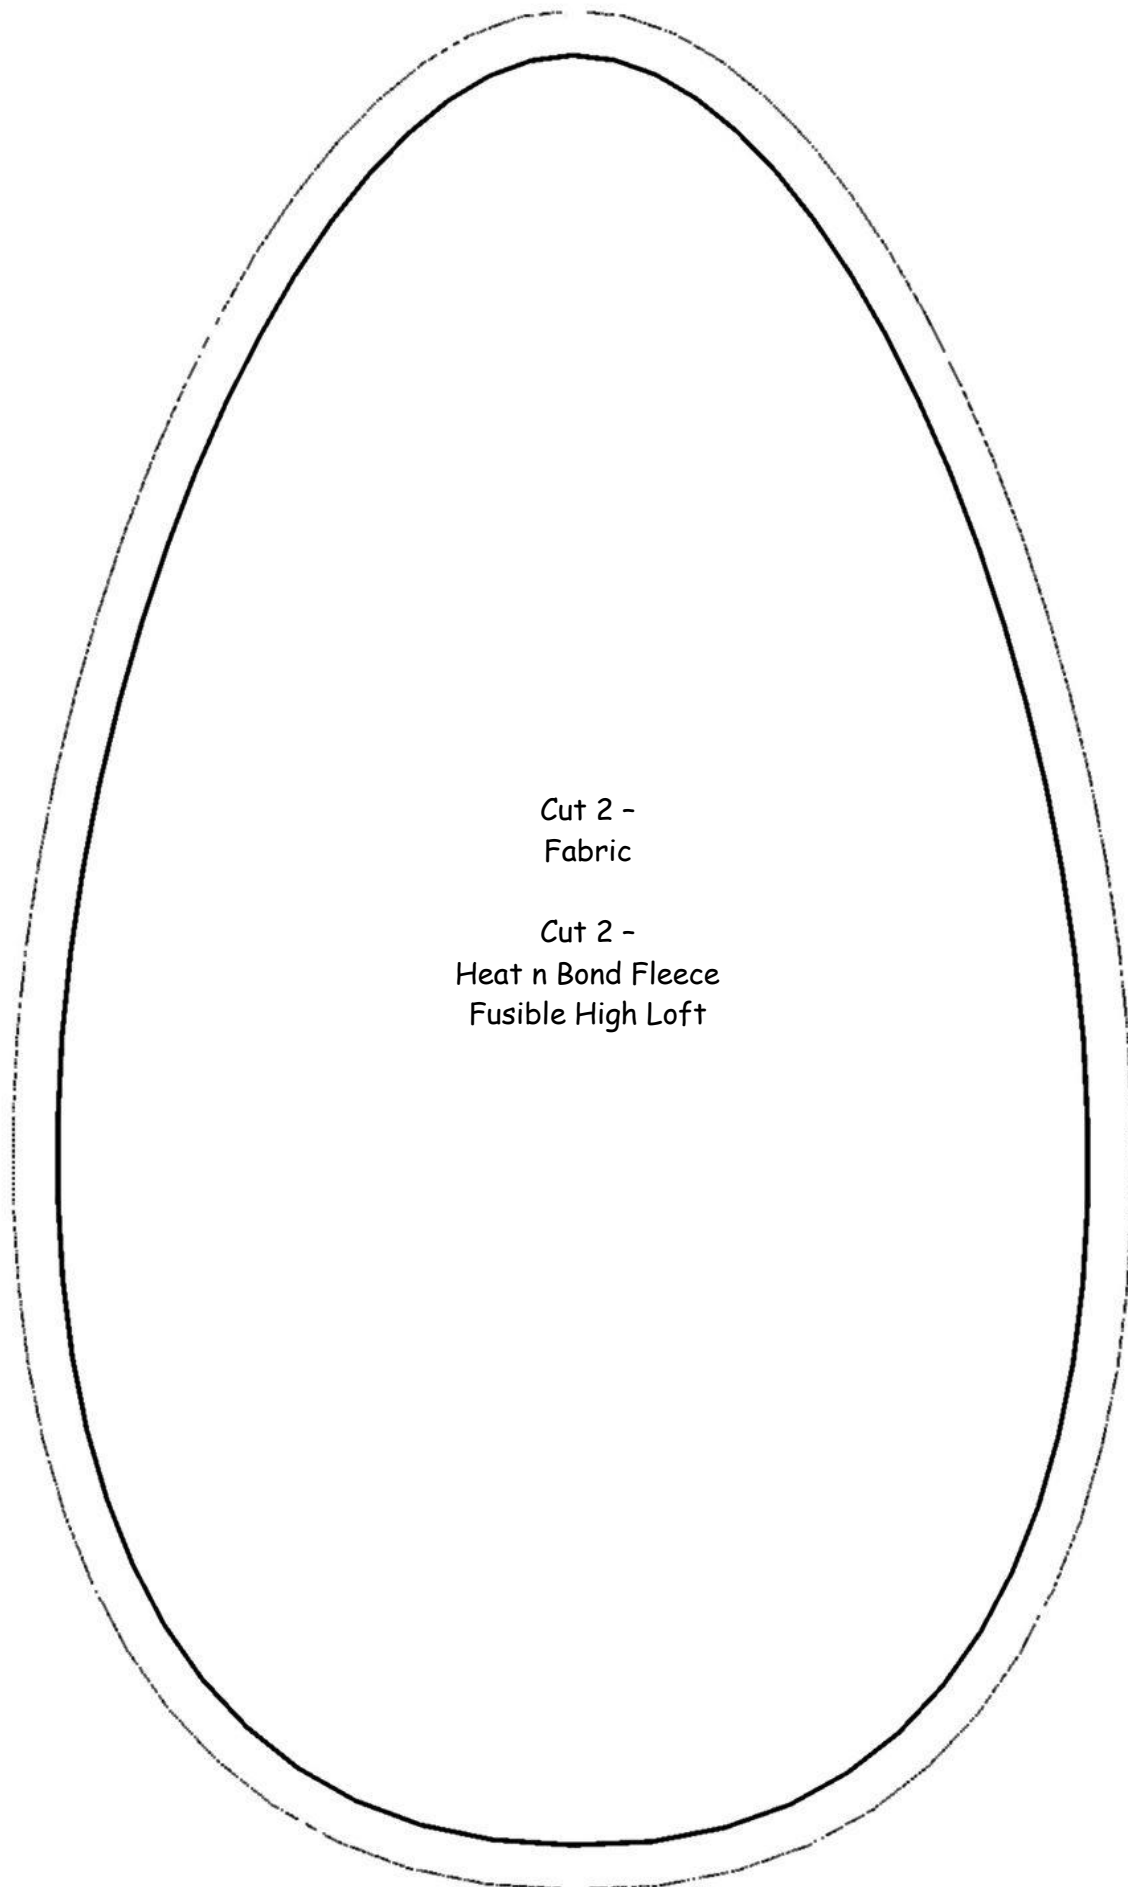

Cut 2 -
Fabric

Cut 2 -
Heat n Bond Fleece
Fusible High Loft

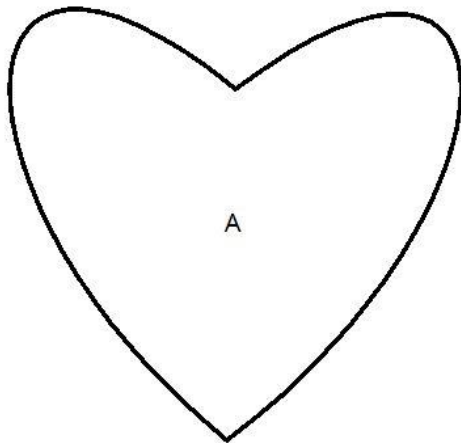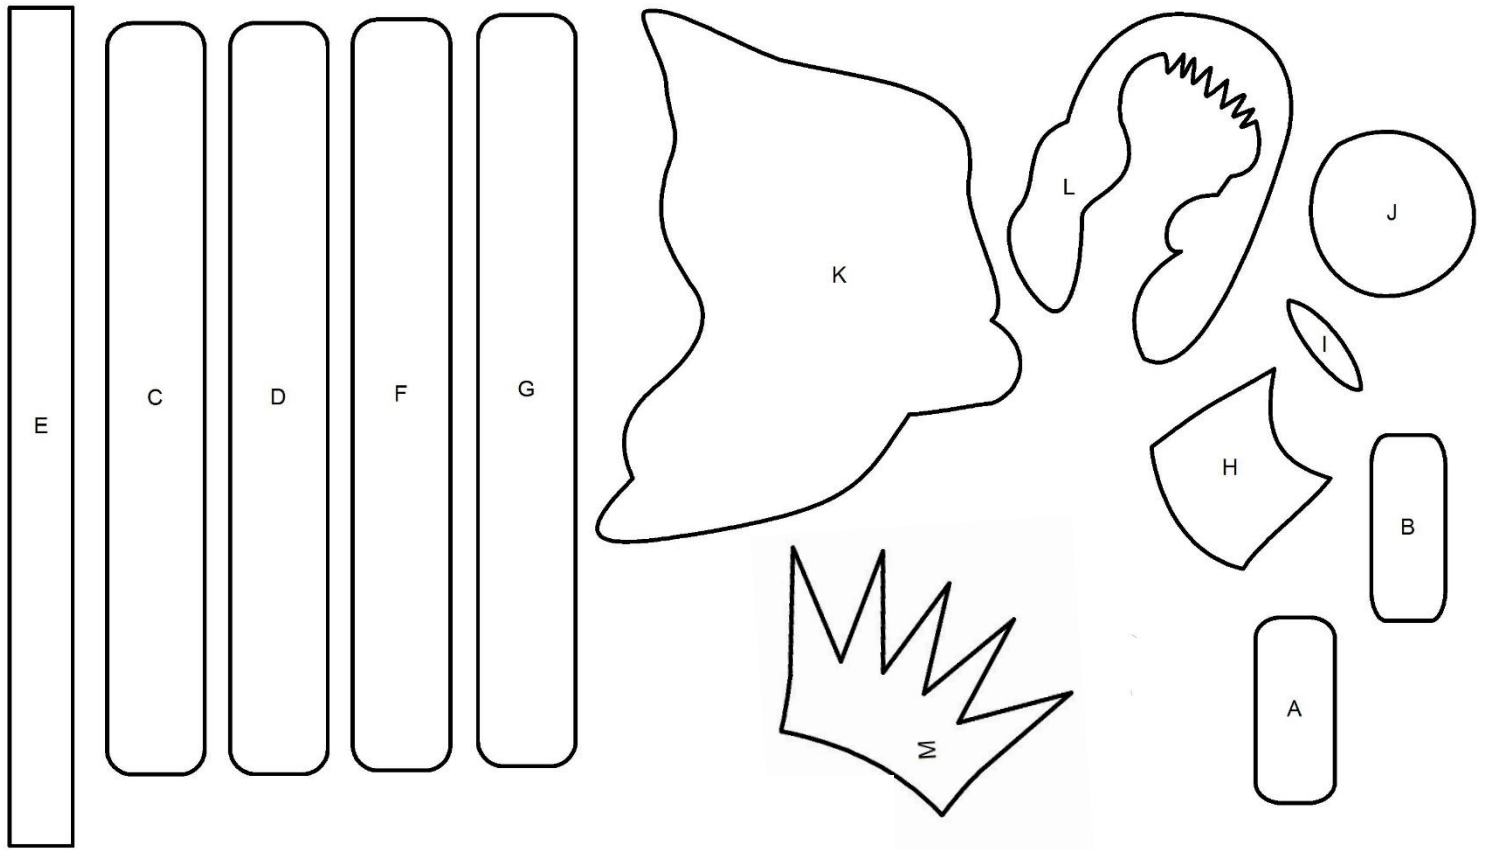

Embroider →

Shhh...
The Princess
is sleeping