
Creatin' in the Sticks



http://createinthesticks.blogspot.com

* Pattens for personal use only, please

SCARY CAT A VINTAGE INSPIRED HALLOWEEN MINI QUILT

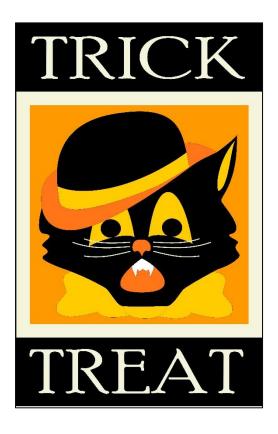

Unfinished Size: 9 1/2" X 14 1/2" Finished Size: 9" X 14"

This pattern is provided for your personal use only and may not be reproduced, sold, or kitted without written permission © Carla Henton – Creatin' in the Sticks http://createinthesticks.blogspot.com 2020 all rights reserved please read through the complete instructions before starting.


Supplies:

<u>HeatnBond EZ Print Lite</u> iron on adhesive – 3 sheets HeatnBond fusible interfacing, light weight StitchnSew Sew-In fleece, High Loft – 11" x 16" SpraynBond basting adhesive

Cotton Fabric: A: 1 background 8 $\frac{1}{2}$ " square (orange) B: 2 - 1" X 8 $\frac{1}{2}$ " strips (off white) C: 2 - 1" X 9 $\frac{1}{2}$ " strips (off white) D: 2 - 3" x 9 $\frac{1}{2}$ " strips (black) For applique: scraps of black, white, yellow, and orange For applique letters: one fat quarter of off white For quilt backing: 1 - 11 $\frac{1}{2}$ " x 16 $\frac{1}{2}$ " For binding: 2 - 2 $\frac{1}{4}$ " x Width of Fabric (black)

Aurifil Thread #2311, #2021, and #2692


Ink Jet Printer, Iron (I love my Oliso), Sewing machine, Sharp scissors, and other basic sewing supplies. Optional: Embroidery floss.



Prepare Quilt top:

Stitch the B strips to the A square with right sides together and ¼" seams. Press the seam allowances towards the outside. Next, stitch the C strips to the top and bottom of the off white sided orange square. Finally, stitch the two black D strips to the top and bottom.

All seams are $\frac{1}{4}$ " and right sides together. The background should measure 9 $\frac{1}{2}$ " x 14 $\frac{1}{2}$ "

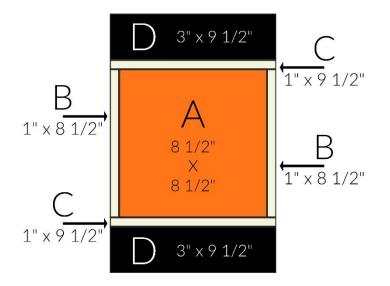

Applique Instructions:

**All patterns have been reversed for EZ printing.

Prepare the applique patterns

Print the applique pattern pieces (the last 3 sheets of this pattern) onto HeatnBond EZ Print Lite sheets with your inkjet printer. Follow the package instructions for printing and bonding to the wrong side of the fabrics.

NO TRACING! How awesome is that?

Tip: When light colored fabric is used as applique on black fabric, prevent "show through" by bonding light weight fusible interfacing on the wrong side of fabric before bonding the HeatnBond Lite. Fuse the HeatnBond lite onto the interfacing and continue as with all appliques.

Cut out all applique pieces on the solid black lines, peel off the backing paper, and place applique with the adhesive side down on the prepared background fabric. The applique template key is included in this pattern.

Carefully cut out letters, peel paper backing off and place on background by referring to cover picture for placement.

Bond the Applique Pieces to the Background

Following the package instructions, work in sections to press the entire applique and letters to the background until the entire applique is fused.

Stitch around appliques and letters

Stitch around the letters with a blanket stitch using Aurifil 50 wt. #2311. Now, stitch around the teeth with a blanket stitch using Aurifil 50 wt. #2021. Use a straight stitch with Aurifil 50 wt thread #2692 to sew about 1/8" in from the edges of the cat pieces. Stitch around each applique piece once or twice.


Stitch whiskers

Embroider or machine stitch the whiskers on the cat using the key as a guide.

Finish the quilt

Following package instructions, spray <u>StitchnSew Sew-in fleece</u> with SpraynBond basting spray and lay on top of wrong side of quilt backing fabric. Smooth to remove wrinkles. Spray back of quilt top and lay on top of fleece, gently smoothing out any wrinkles.


Quilt as desired, trim, and add the binding with preferred method.

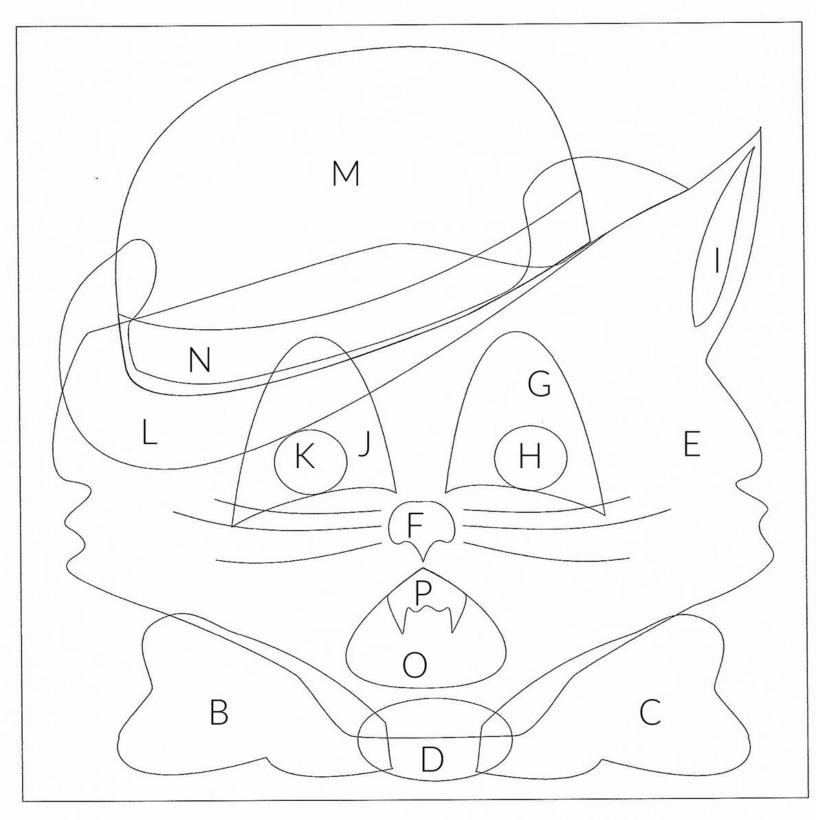



SCARY CAT

KEY FOR TEMPLATE PLACEMENT



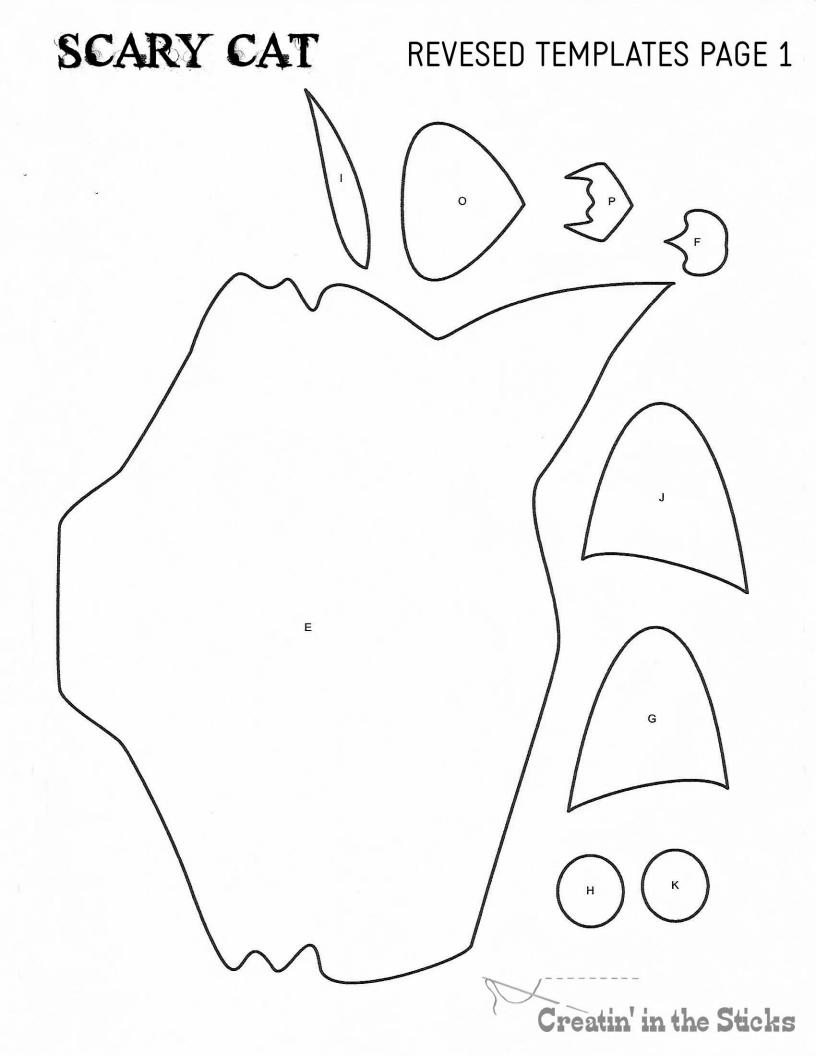

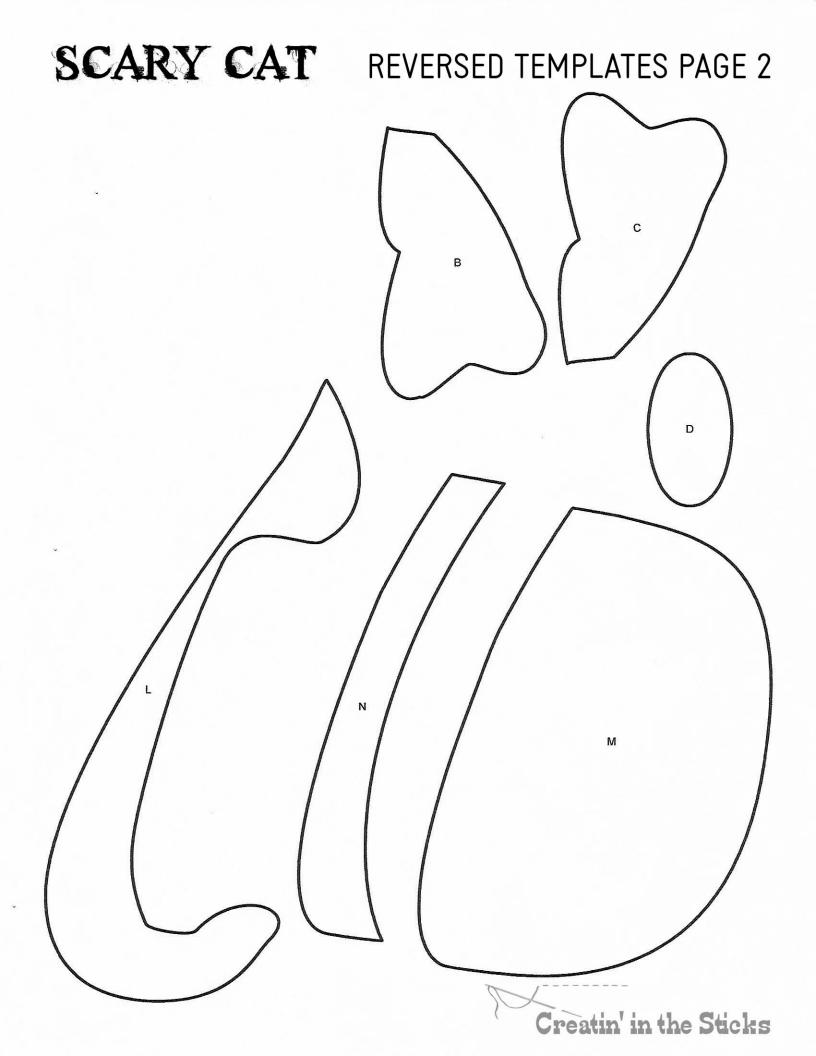

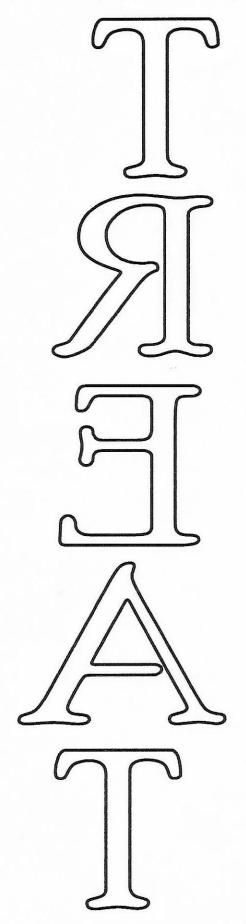

SCARY CAT REVERSED LETTER TEMPLATES

