

# Creatin' in the Sticks




<http://createinthesticks.blogspot.com>

*\*Patterns for personal use only, please*

## Cruisin' with My Peeps HeatnBond Applique

Designed for Thermoweb.com

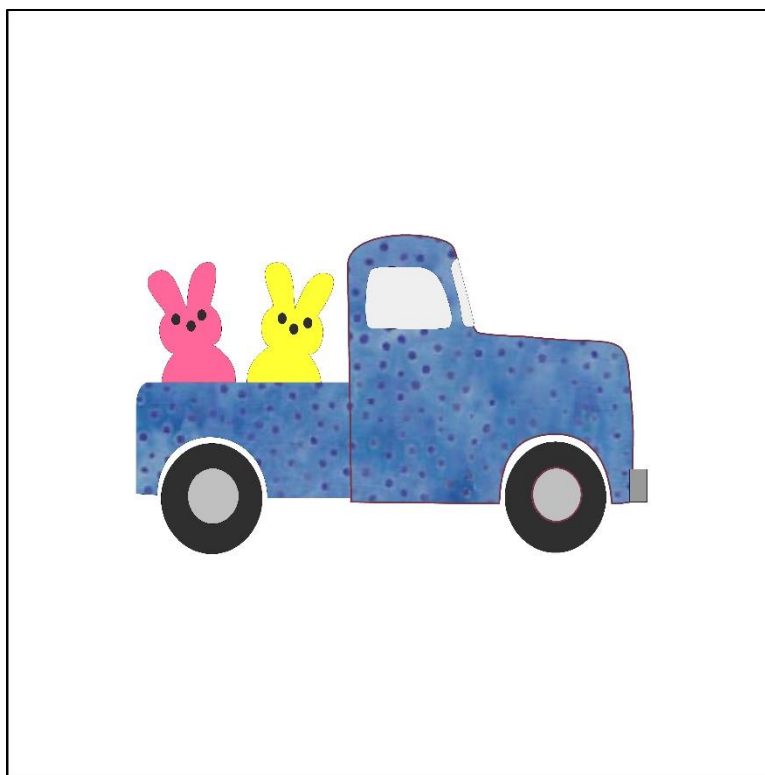

This pattern is provided for your personal use only and may not be reproduced, sold, or kitted without written permission

© Carla Henton – Creatin' in the Sticks

<http://createinthesticks.blogspot.com>

2021 all rights reserved

*please read through the complete instructions before starting.*

### **Supplies:**

Cruisin' with My Peeps Applique Pattern

[HeatnBond Light Weight Non-Woven Interfacing](#)  
[HeatnBond Soft Stretch Lite Fusible Web Adhesive](#)  
[Pressing Paper](#)

1 - Cotton t-shirt pre-washed (this one is 4T)

Cotton fabric: blue – 6 ½" x 6 ½" scrap for truck  
Small scraps of yellow, pink, grey, light grey, and black

Aurifil 50 wt thread: #2692

Ink Jet Printer, Iron (I love my pink Oliso), Permanent Marker for tracing, Sharp scissors, Sewing Machine,  
And general sewing supplies  
optional – fabric marker for eyes and nose

### **Cruisin' with My Peeps Applique Instructions:**

Trace all the templates onto the paper side of the HeatnBond Soft Stretch Lite Fusible Web Adhesive.

The patterns have been reversed for you.

Place the template pieces, fusible web side down, on the wrong side of the cotton fabrics.

Working in sections for 5 seconds at a time, press the fusible web to the wrong side of the fabrics  
with an iron on high heat and no steam. Let the applique pieces cool.

Cut out all applique pieces on the traced lines.

Cut one piece of HeatnBond Light weight interfacing 6 ½" x 6 ½".

Turn the shirt inside out and place the interfacing adhesive side down on the wrong side of the front of the shirt  
where the applique will be placed. Follow the package instructions to bond the interfacing to the shirt.

The interfacing will stabilize the shirt for sewing the applique.

Cut one piece of Pressing Paper in half on the fold.

Turn the shirt right side out and place the shirt on an ironing surface front side up.

Insert one half sheet of Pressing Paper, shiny side up, in the shirt and press the shirt front smooth.

Peel the backing paper off of the applique pieces and place them adhesive side down on the  
prewashed t-shirt using the pattern as a guide.

When the applique is positioned correctly, bond the applique pieces to the shirt by holding the iron with high heat  
and steam on the applique for 20 seconds.


Work in sections until all the pieces have been bonded. Let the shirt cool and remove all of the  
Pressing Paper.

Use the Aurifil thread to stitch around each applique piece 2 or 3 times.

If desired, use a fabric marker to put dots for eyes and nose as shown.

# Cruisin' with My Peeps applique templates

all templates  
have been  
reversed for  
you

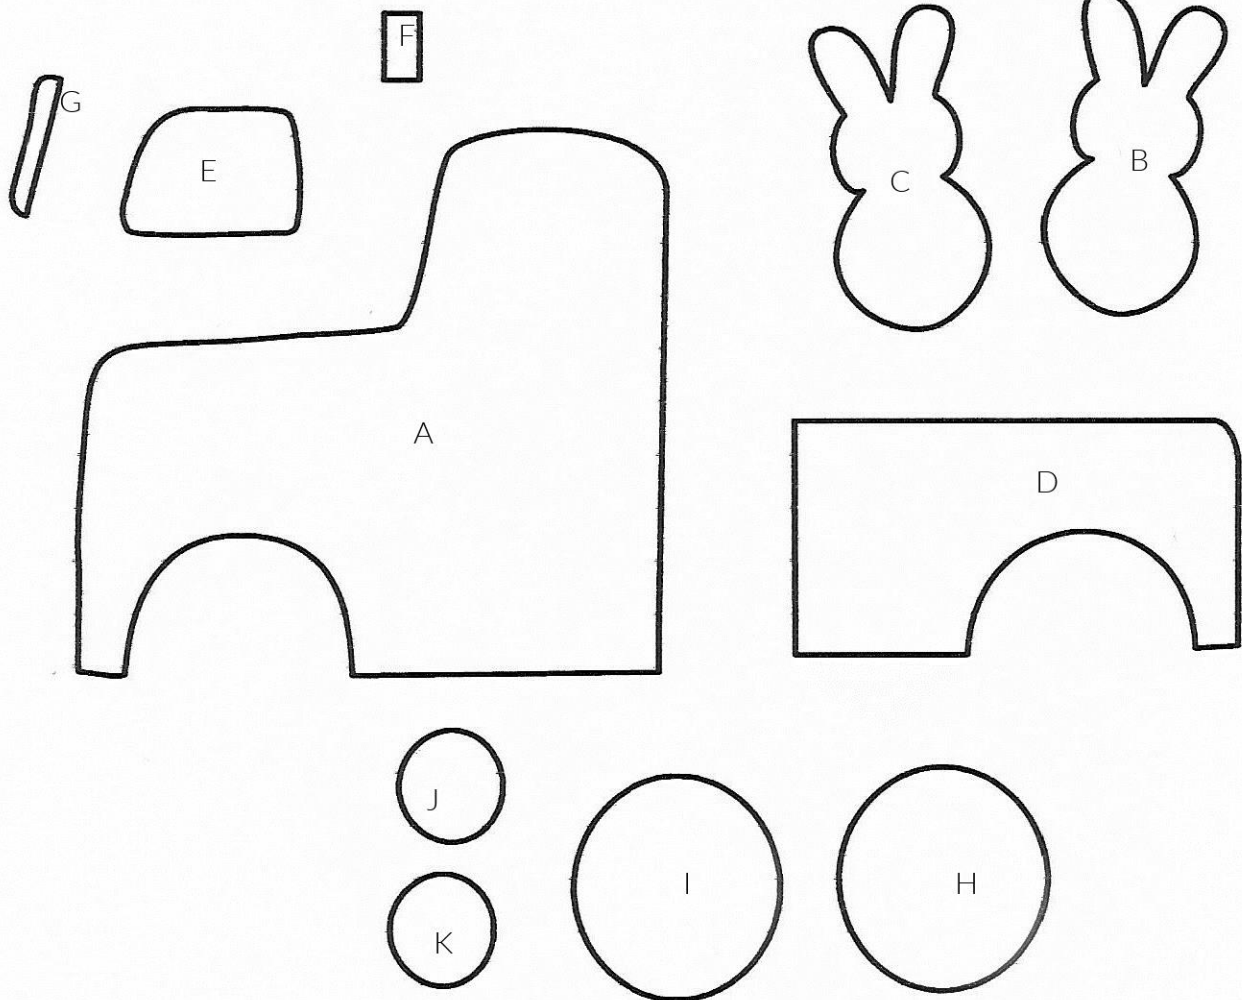

# Crusin' with My Peeps

## Key for applique placement

